

1.2A Synchronous Buck LED Driver

Features

- 2.7V~5.5V Input Voltage
- 0.2V Reference Voltage
- 1.2A Peak Output Current
- Low Dropout Operating at 100%Duty Cycle
- Over-Temperature Protection
- Over-Current Protection
- Fixed 1.5MHz Switching Frequency
- <1 μ A Input Current During Shutdown
- DFN 2mm \times 2mm \times 0.75mm -6L Package

Applications

IR-LED Driver
NB Camera
VCSEL Driver


General Description

The AW36612 is a LED driver that designs with current mode. The AW36612 utilizes a 1.5MHz frequency synchronous buck converter to provide power to the 1.2A peak constant current LED sources. The device also provides hardware RUN pin to realize ON/OFF dimming function. Input voltage from 2.7V to 5.5V makes the AW36612 ideally suited for single Li-Lon battery powered applications.

The device operates over a -40°C to +85°C ambient temperature range. The fault protection includes OCP function which ensure the peak of inductor current is less than 1.7A. The use of synchronous switches instead of external Schottky diode improves the efficiency.


The AW36612 is available in DFN 2mm \times 2mm \times 0.75mm -6L package.

Typical Application Circuit

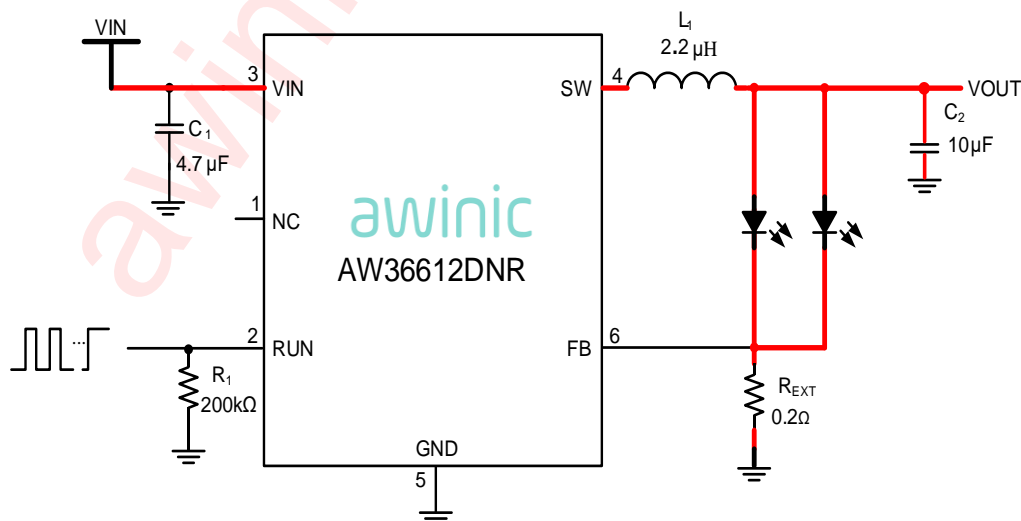

Typical Application Circuit of AW36612DNR

Pin Configuration And Top Mark

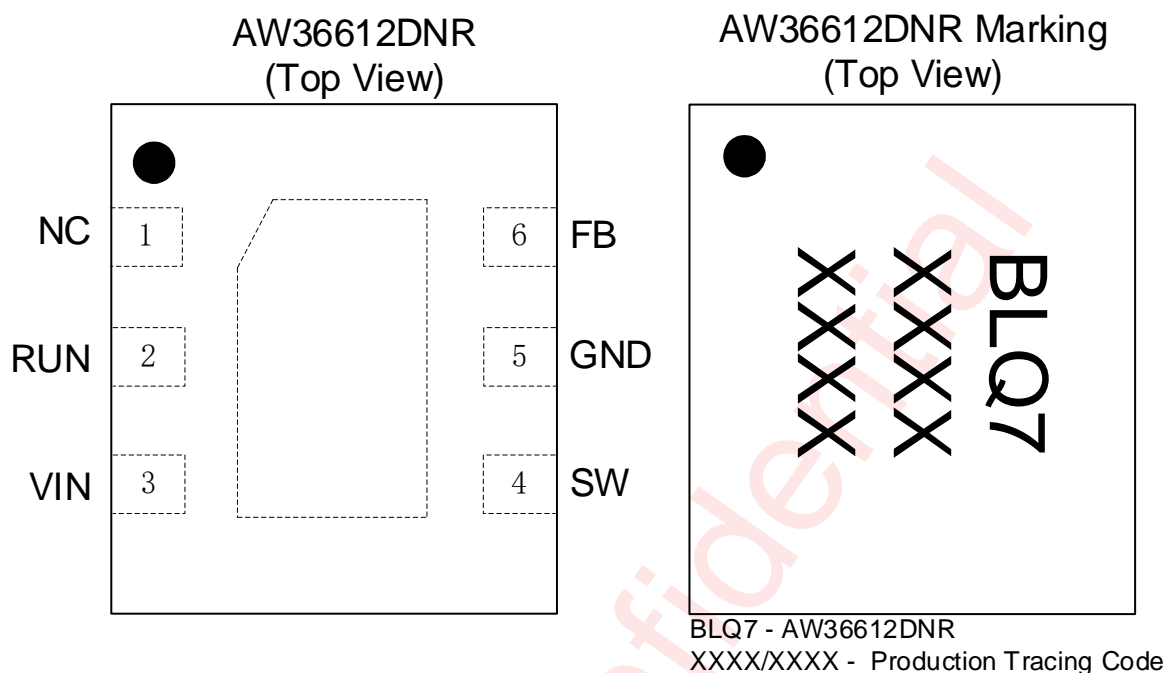


Pin Configuration and Top Mark


Pin Definition

No.	NAME	DESCRIPTION
1	NC	Not connect
2	RUN	Enable Control Input. Do not leave RUN pin floating
3	VIN	Power supply: 2.7V~5.5V
4	SW	Switch Node connected to Inductor
5	GND	Ground
6	FB	Feedback input pin. The buck regulator senses feedback voltage via FB and regulates the FB voltage at 0.2V

Functional Block Diagram

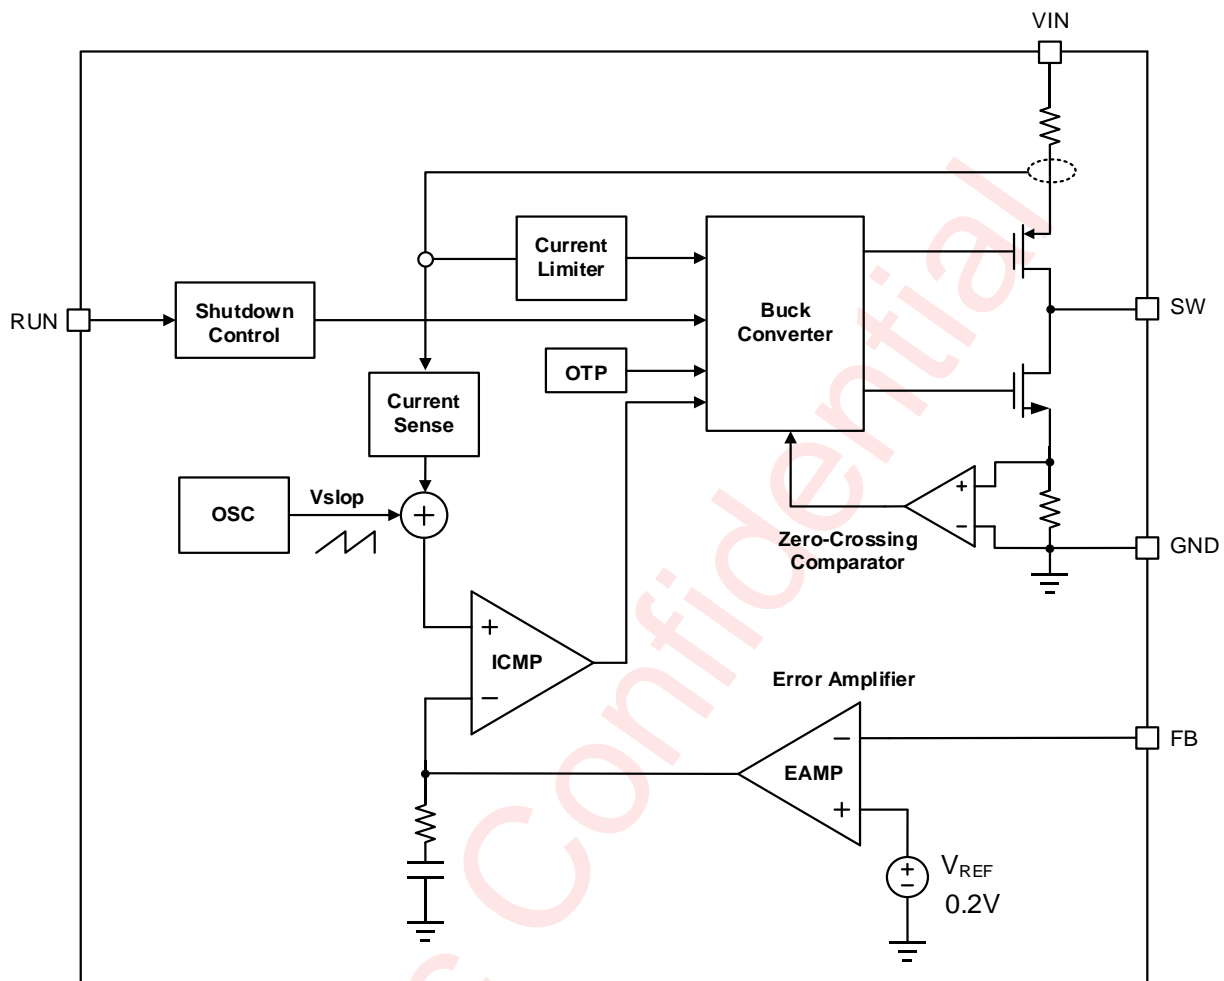

Typical Application Circuits

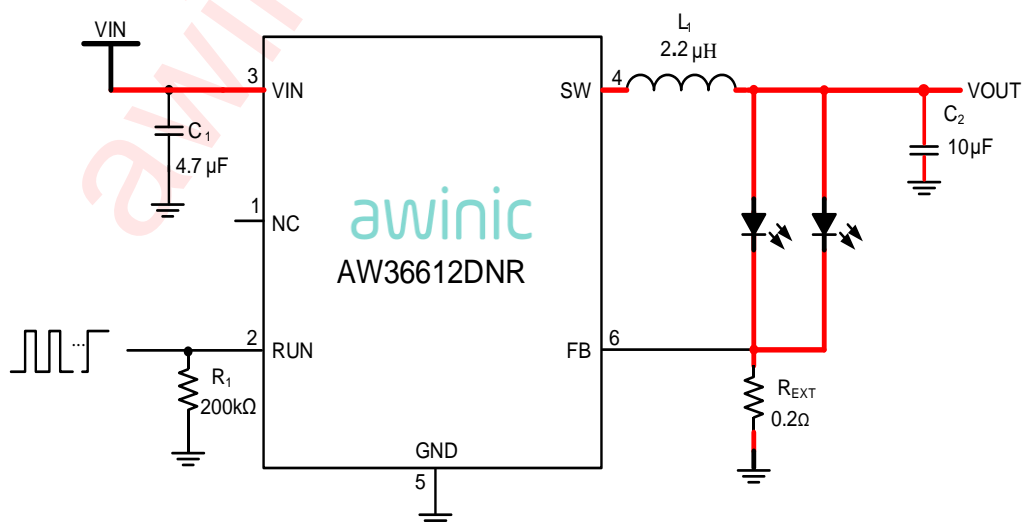

AW36612DNR Application Circuit

Ordering Information

Part Number	Temperature	Package	Marking	Moisture Sensitivity Level	Environmental Information	Delivery Form
AW36612DNR	-40°C ~ 85°C	DFN 2mm×2mm×0.75mm m -6L	BLQ7	MSL1	ROHS+HF	3000 units/ Tape and Reel

Absolute Maximum Ratings^(NOTE1)

PARAMETERS		RANGE
Supply voltage range VIN		-0.3V to 6V
Input voltage range	RUN, FB	-0.3V to (VIN+0.3)V
Output voltage range	SW	-0.3V to (VIN+0.3)V
Junction-to-ambient thermal resistance θ_{JA}		105°C /W
Maximum operating junction temperature T _{JMAX}		150°C
Storage temperature T _{STG}		-65°C to 150°C
Lead temperature (soldering 10 seconds)		260°C
ESD(Including CDM HBM MM) ^(NOTE 2)		
VBUS PIN HBM		±2kV
Other PINS HBM		±2kV
CDM		±1.5kV
Latch-Up		
Test condition: JEDEC STANDARD NO.78F NOVEMBER 2016		+IT: 200mA -IT: -200mA

NOTE1: Conditions out of those ranges listed in "absolute maximum ratings" may cause permanent damages to the device. In spite of the limits above, functional operation conditions of the device should within the ranges listed in "recommended operating conditions". Exposure to absolute-maximum-rated conditions for prolonged periods may affect device reliability.

NOTE2: The human body model is a 100pF capacitor discharged through a 1.5kΩ resistor into each pin.

Test method: ANSI/ESDA/JEDEC JS-001-2017. JEDEC EIA/JESD22-C101F(CDM).

Recommended Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _{IN}	Input voltage	2.7		5.5	V
C _{IN}	Input capacitance	4.7		100	μF
C _{OUT}	Output capacitance	4.7	10	100	μF
L ₁	Converter Output Inductor	1	2.2	4.7	μH
T _A	Operating free-air temperature range	-40		85	°C

Electrical Characteristics

V_{IN}=5V and T_A=25°C for typical values (unless otherwise noted)


PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
SUPPLY VOLTAGE AMD CURRENT						
V _{IN}	Input Voltage Range		2.7		5.5	V
I _{SD}	Shutdown Input Current	RUN=GND			1	μA
POWER-ON-RESET						
V _{POR}	Rising POR Threshold		2.05	2.2	2.6	V
V _{POR_HYS}	POR Hysteresis			100		mV
REFERENCE VOLTAGE						
V _{FB}	Voltage of FB		0.19	0.2	0.21	V
I _{FB}	FB Input Current	V _{IN} =5V	-100		100	nA
INTERNAL POWER MOSFETS						
F _{SW}	Switching Frequency		1.2	1.5	1.9	MHz
R _{P_FET}	High Side P-FET Switch ON Resistance	I _{SW} =10mA		260		mΩ
R _{N_FET}	Low Side N-FET Switch ON Resistance	I _{SW} =10mA		140		mΩ
T _{ON_MIN}	Minimum On-Time	(note 3)		100		ns
D _{max}	Maximum Duty Cycle				100	%
PROTECTION						
I _{LIM}	Maximum inductor Current-Limit	I _{P_FET} , V _{IN} =5V	1.3	1.7	2.2	A
T _{OTP}	Over-Temperature Protection	(note 3)		160		°C
T _{OTP_HYS}	Over-Temperature Protection hysteresis			30		°C
START-UP AND SHUTDOWN						
V _{IH}	RUN Input High Threshold	V _{IN} =2.7V~5.5V	1			V
V _L	RUN Input Low Threshold	V _{IN} =2.7V~5.5V			0.4	V
I _{RUN}	RUN Leakage Current	V _{IN} =5V, V _{RUN} =5V	-0.1		0.1	μA

NOTE3: Guarantee by design, not production test.


Typical Characteristics

VIN=5V and T_A=25°C for typical values (unless otherwise noted)


Efficiency vs Load Current

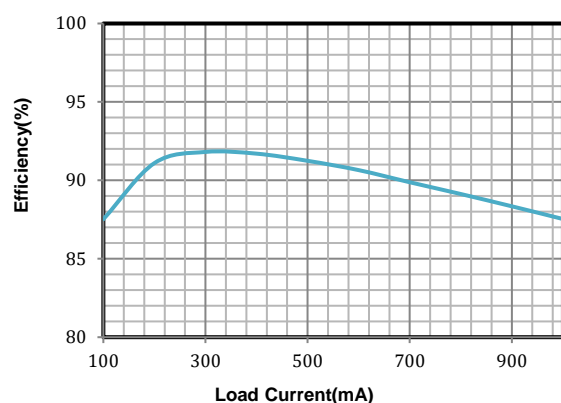


Reference Voltage vs Junction Temperature

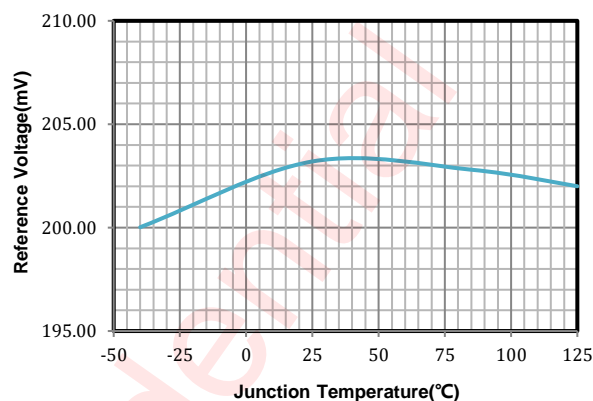


Switching Frequency vs Supply Voltage

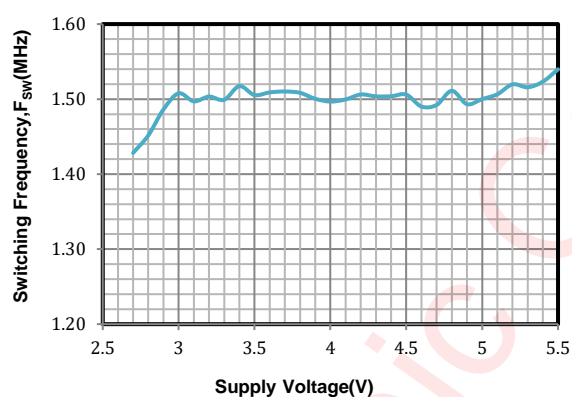


Switching Frequency vs Junction Temperature

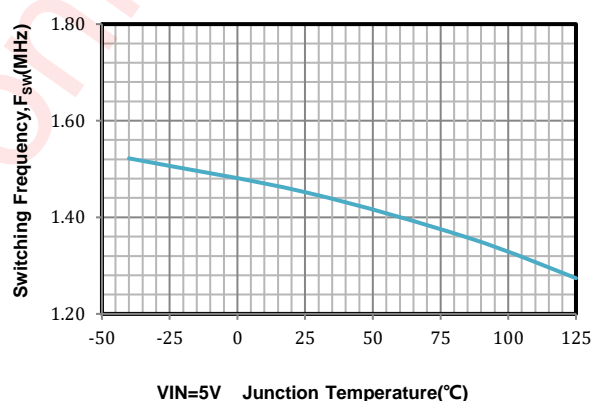

Maximum Inductor-Limit vs Supply Voltage

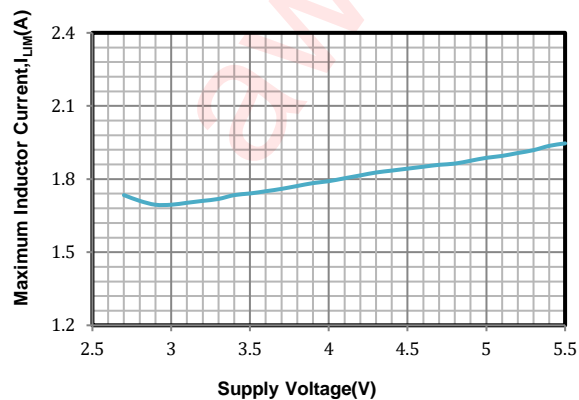

Maximum Inductor-Limit vs Junction Temperature

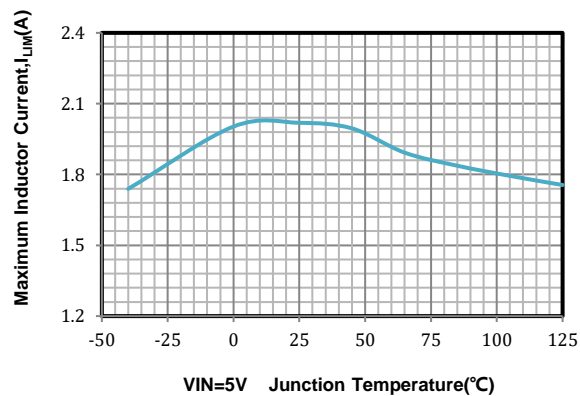

Detailed Functional Description

Main Control Loop

The AW36612 is a LED driver that designs with current mode. Input voltage from 2.7V to 5.5V makes the AW36612 ideally suited for single Li-Lon battery powered applications. In normal operation, the internal P-channel power MOSFET is turns on each cycle. The P-FET is turned off and the N-FET is turned on for continuous current by the voltage on the ICMP node, which is controlled by output of the error amplifier(EAMP).

The current output can be set by external R_{EXT} resistors. The R_{EXT} resistor connected between V_{OUT} and ground allows the EAMP to receive an output feedback voltage V_{FB} at FB pin. The voltage on the FB pin is regulated to the 0.2V typically, The R_{EXT} resistor needs to be placed as close as possible to the FB pin. When the load current increases, it causes a slightly decrease in V_{FB} relative to the 0.2V reference until the average inductor current matches the new load current.

Enable/Shutdown

The AW36612 device has an enable pin for RUN. The device starts to operate as long as the RUN voltage is higher than V_{IH} . When RUN voltage is lower than V_{IL} , the device is in shut down mode, The internal power MOSFETs turn off, the quiescent current I_{SD} reduces to 1 μ A maximum.

Slop Compensation

The AW36612 device incorporates a 1.5MHz constant frequency-synchronous peak current mode. To prevent sub-harmonic oscillations, the AW36612 sense the peak current and add slop compensation to stable the converter. It is accomplished by adding a compensating ramp to the inductor current.

Over-Temperature Protection(OTP)

The AW36612 device monitors device junction temperature. When the junction temperature reaches thermal shutdown threshold T_{OTP} (TYP:160°C), the device turns off the both power MOSFETs, allowing the junction temperature to decrease. Once the junction temperature falls below T_{OTP_HYS} (TYP:30°C), the device recovers to normal operation.

Over-Current Protection(OCP)

The current limit is sensed by P-channel MOSFET, when the inductor current limit reaches I_{LIM} (TYP:1.7A), the AW36612 device turns off P-channel power MOSFET until the next switching period. If the over-current condition persists, the device operates continuously in current limit.

Application Information


Output Current Setting

The current output can be set by external R_{EXT} resistors. The R_{EXT} resistor connected between V_{OUT} and ground allows the EAMP to receive an output feedback voltage V_{FB} at FB pin. The voltage on the FB pin is regulated to the 0.2V typically, and the current output on V_{FB} pin can be calculated by using:

$$I_{LED} = \frac{V_{FB}}{R_{EXT}}$$

Where

- $V_{FB}=0.2V$ (typical)
- $R_{EXT}=0.2\Omega$ recommended

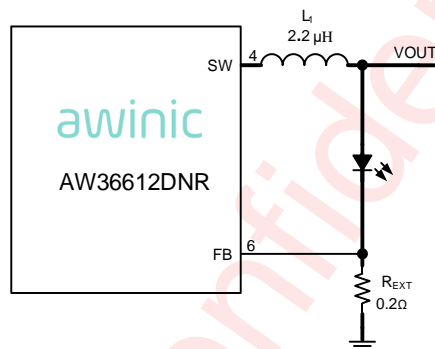

External Resistor Configuration

Inductor Selection

For high efficiencies, the inductor should have a low DC resistance to minimize conduction losses. Especially at high-switching frequencies the core material has a higher impact on efficiency. When using small chip inductors, the efficiency is reduced mainly due to higher inductor core losses. This needs to be considered when selecting the appropriate inductor. The inductor value determines the inductor ripple current. The larger the inductor value, the smaller the inductor ripple current and lower the conduction losses of the converter. Conversely, larger inductor values cause a slower load transient response. The recommended inductor value can be calculated as below:

$$L \geq \frac{V_{OUT}(1-D)}{f_{SW} \cdot \Delta I_L}$$

Where D is duty cycle of main switch

$$D = \frac{V_{OUT}}{V_{IN}}$$

And $f_{SW}=1.5MHz$.

$$I_{L,max} = I_L + \frac{1}{2}\Delta I_L$$

To avoid the saturation of the inductor, the inductor should be rated at least for the maximum output current of the converter plus the inductor ripple current.

Input Capacitor Selection

Choosing the correct size and type of input capacitor helps minimize the voltage ripple caused by the switching of the AW36612 buck converter and reduce noise on the buck converter's input pin that can feed through and disrupt internal analog signals. In the typical application circuit a 4.7- μF ceramic input capacitor works well. It is important to place the input capacitor as close as possible to the AW36612 input (VIN) pin. This reduces the series resistance and inductance that can inject noise into the device due to the input switching currents.

Output Capacitor Selection

The AW36612 is designed to operate with a 10 μF ceramic output capacitor. When the buck converter is running, the output capacitor supplies the load current during the buck converter off-time. When the P-channel power MOSFET turns off, the inductor energy is discharged through the internal NMOS switch, supplying power to the load and restoring charge to the output capacitor. This causes a sag in the output voltage during the off-time and a rise in the output voltage during the on-time. The output capacitor is therefore chosen to limit the output ripple to an acceptable level depending on load current and input/output voltage differentials and also to ensure the converter remains stable.


Larger capacitors or capacitors in parallel can be used if lower output voltage ripple is desired. The output ripple is the sum of the voltage across the ESR and the ideal output capacitor:

$$\Delta V = \Delta I_L \left(ESR + \frac{1}{8 \cdot f_{SW} \cdot C_{OUT}} \right)$$

Where

$$\Delta I_L = \frac{V_{OUT} \times (1 - D)}{f_{SW} \cdot L}$$

$$T = \frac{1}{f_{SW}}$$

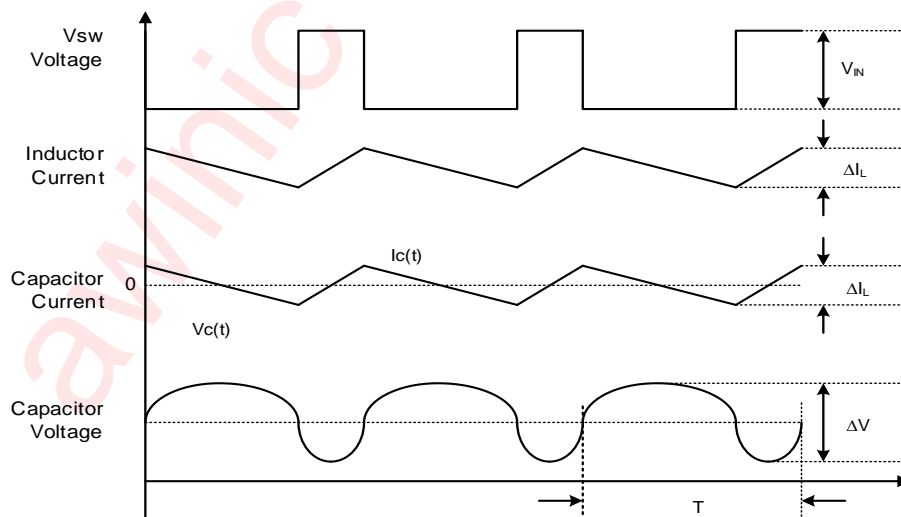

Output Ripple

When choosing the input and output ceramic capacitors, choose the X5R or X7R dielectric formulations. These dielectrics have the best temperature and voltage characteristics of all the ceramics for a given value and size.

Thermal Consideration

In most applications, the AW36612 does not dissipate much heat due to its high efficiency. But, in applications where the AW36612 is running at high ambient temperature with low supply voltage and high duty cycles, the heat dissipated may exceed the maximum junction temperature reaches approximately 160°C, both power switches will be turned off and the SW node will become high impedance.

To avoid the AW36612 from exceeding the maximum junction temperature, the user will need to do some thermal analysis. The goal of the thermal analysis is to determine whether the power dissipated exceeds the recommended junction temperature of the part. The power dissipated by the part is approximated:

$$P_D \cong I_{OUT}^2 (R_{P_FET} \cdot D + R_{N_FET} \cdot (1 - D))$$

The temperature rise is given by:

$$T_R = P_D \cdot \theta_{JA}$$

Where P_D is the power dissipated by the regulator, The θ_{JA} is the thermal resistance from the junction of the die to the ambient temperature. The junction temperature, T_J is given by:

$$T_J = T_A + T_R$$


Where T_A is the ambient temperature.

PCB Layout Consideration

Layout Guidelines


The high switching frequency of the AW36612 makes the design of PCB Layout important. The following steps give some guidelines to help ensure a proper layout for optimal performance.

1. Place the input capacitors as close to the device as possible. The traces which connect the input capacitors to both the VIN and GND pins should be short and wide to reduce parasitic inductance and resistance.
2. The trace between the inductor and the SW pin should be as short as possible to minimize the radiated noise.
3. Keep the trace of FB as short as possible and away from the switching signal. The FB trace must be shield with a ground plane.
4. Maximize the area of PCB copper connected to the GND pin for good thermal and noise performance.

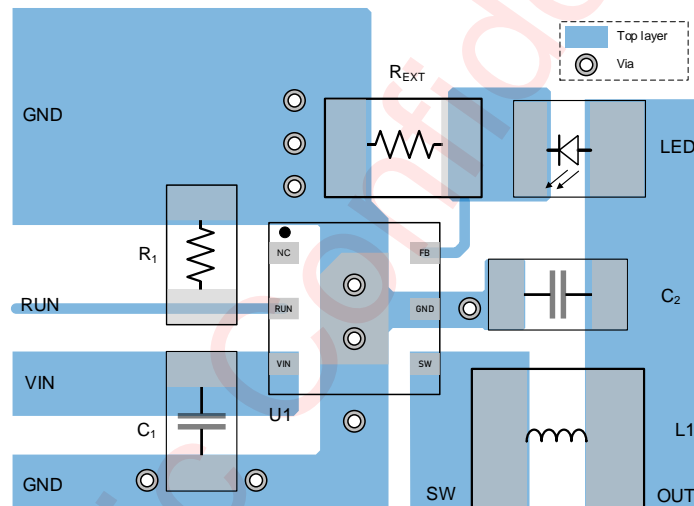


AW36612DNR Layout Example

Tape And Reel Information

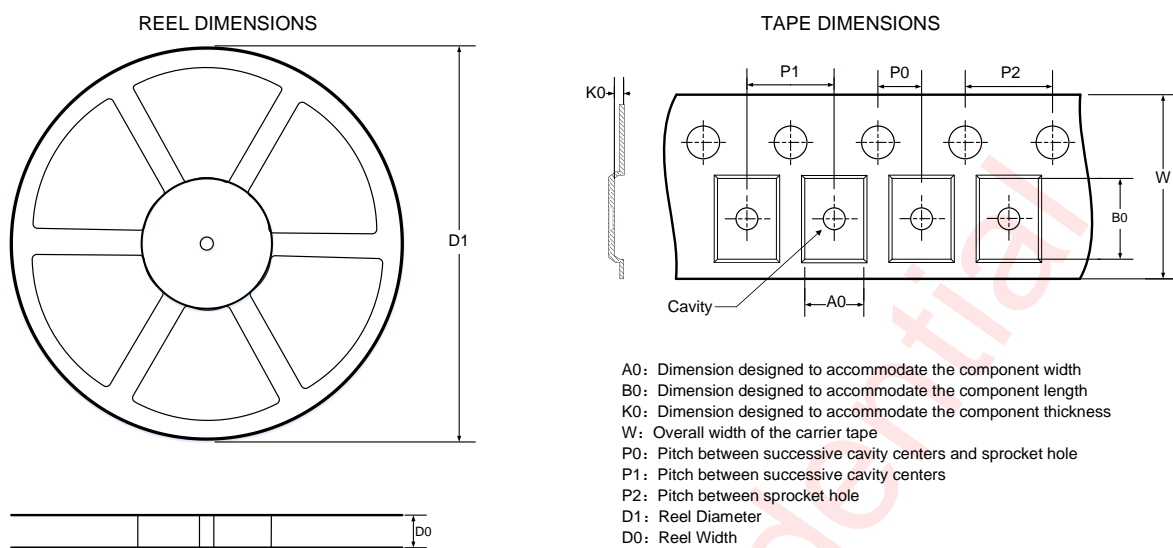

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

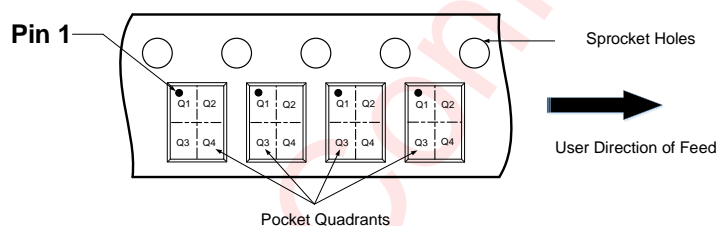


Note: The above picture is for reference only. Please refer to the value in the table below for the actual size

DIMENSIONS AND PIN1 ORIENTATION

D1 (mm)	D0 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
178	8.4	2.3	2.3	1	2	4	4	8	Q1


All dimensions are nominal

Package Description

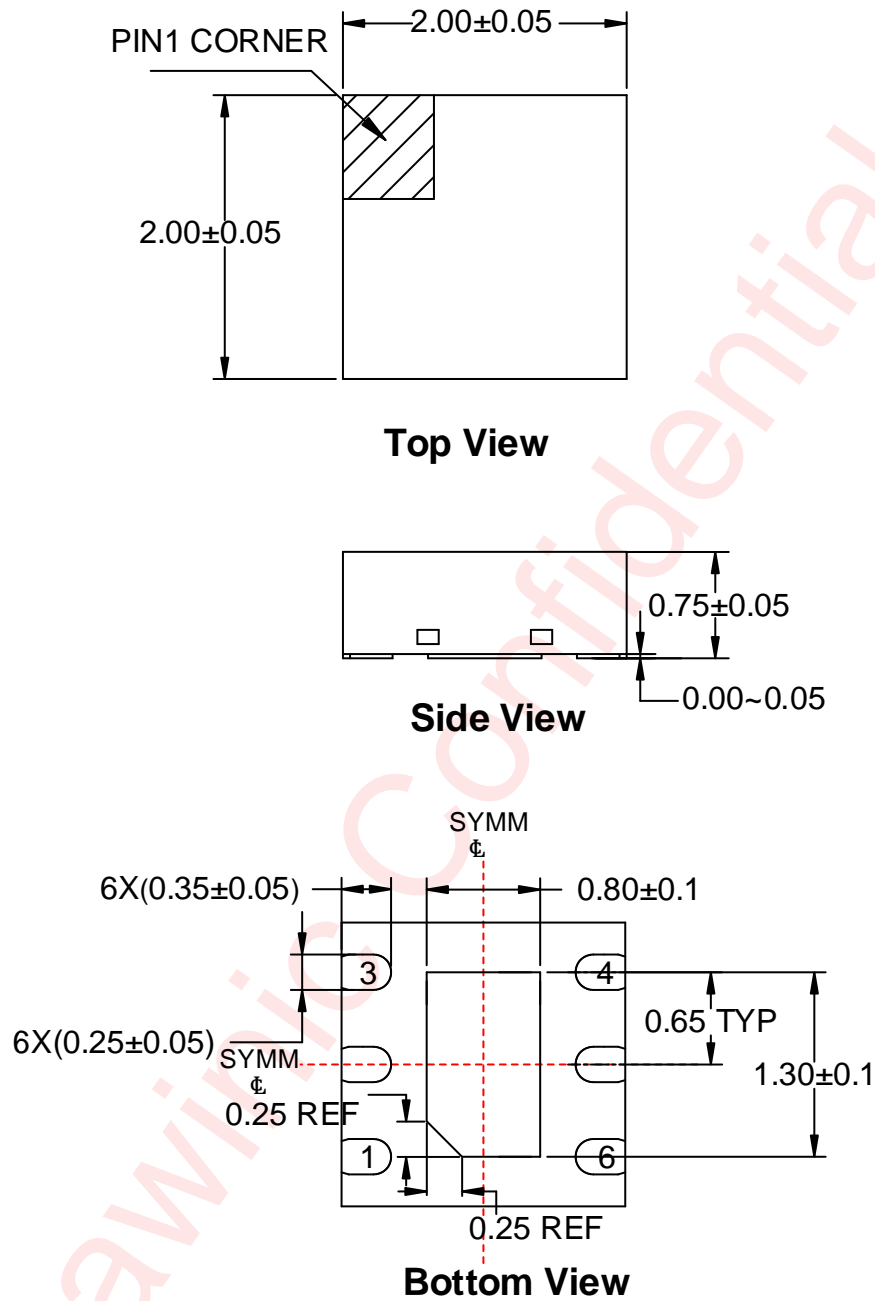

Unit: mm

Land Pattern Data

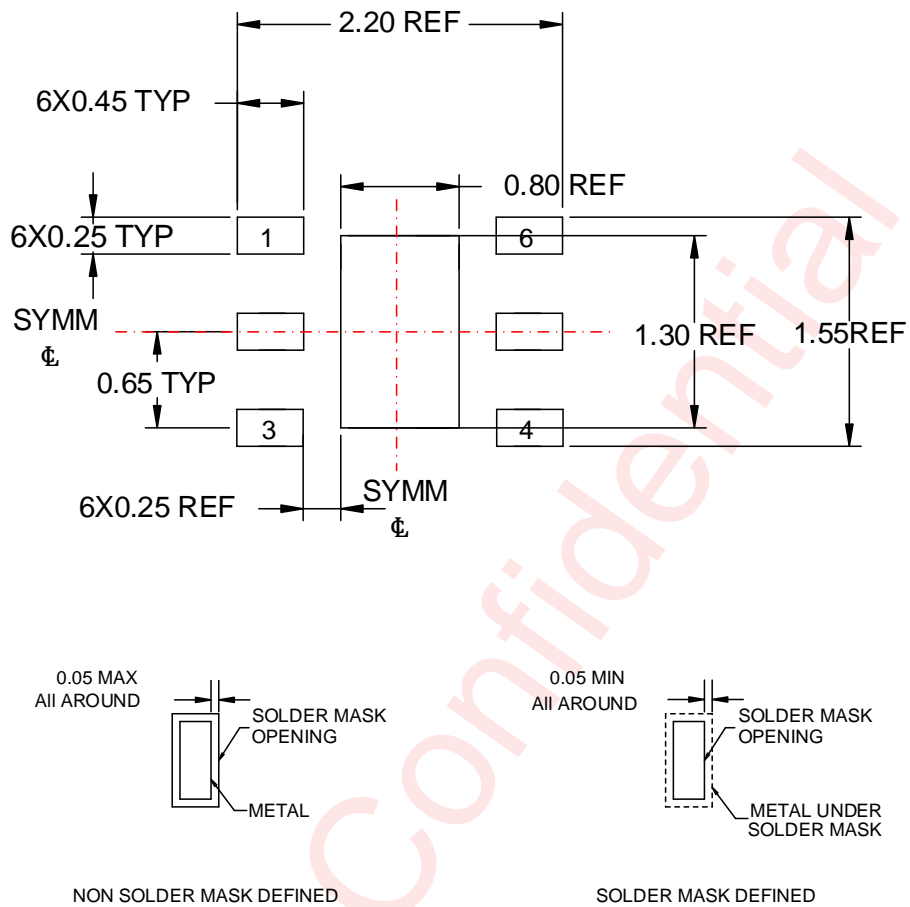

Unit: mm

Revision History

Version	Date	Change Record
V1.0	Apr. 2023	Officially released
V1.1	Jul. 2023	Update the range of the maximum inductor current limit.(P6)
V1.2	Aug. 2023	1.Update the range of the I_{SD} and I_{FB} .(P6) 2.Update the current limit curve.(P7) 3.Update the Package Description.(P14)
V1.3	Nov.2023	Update the recommended range of the inductor.(P5)

Disclaimer

All trademarks are the property of their respective owners. Information in this document is believed to be accurate and reliable. However, Shanghai AWINIC Technology Co., Ltd (AWINIC Technology) does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

AWINIC Technology reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. Customers shall obtain the latest relevant information before placing orders and shall verify that such information is current and complete. This document supersedes and replaces all information supplied prior to the publication hereof.

AWINIC Technology products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an AWINIC Technology product can reasonably be expected to result in personal injury, death or severe property or environmental damage. AWINIC Technology accepts no liability for inclusion and/or use of AWINIC Technology products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications that are described herein for any of these products are for illustrative purposes only. AWINIC Technology makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

All products are sold subject to the general terms and conditions of commercial sale supplied at the time of order acknowledgement.

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Reproduction of AWINIC information in AWINIC data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. AWINIC is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of AWINIC components or services with statements different from or beyond the parameters stated by AWINIC for that component or service voids all express and any implied warranties for the associated AWINIC component or service and is an unfair and deceptive business practice. AWINIC is not responsible or liable for any such statements.